


<b>Descript. of the article</b>	Aluminium air termination mast with 4-leg folding support made of stainl. steel and 4 threaded pieces made of stainl. steel to be fixed on concrete bases. Height of the air termination mast: 6,0m. <b>For wind speed zones I – IV For ground category III- IV (max. gust speed 175 km/h)</b>
<b>Article No.</b>	<b>48 37 56</b>

Customs tariff No.: 85389099

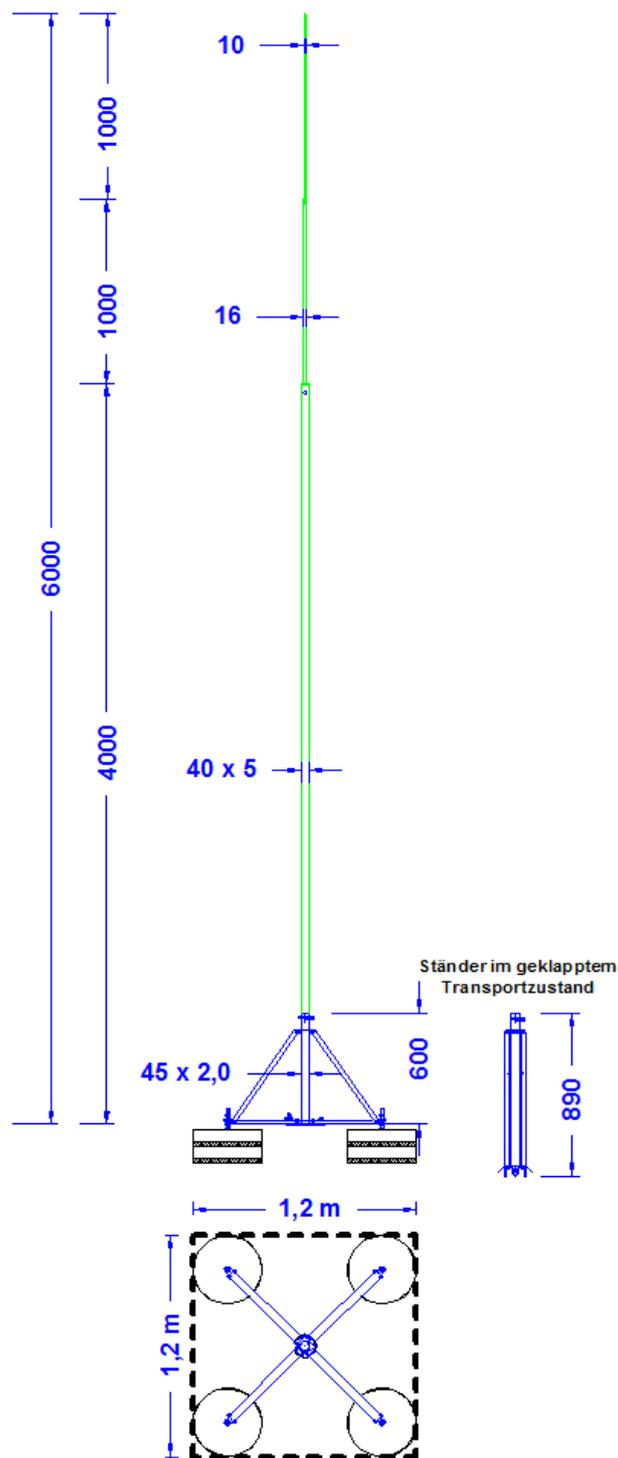

Description	∅	Material	Length	Wind speed zone	Remarks
<b>Mast main tube</b>	40mm	Aluminium tube ALMGSI0,5	4,0m	Wind speed zone I-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). For ground category II - IV with max. gust speed 175 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel V2A.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 160 kg.</li> <li>Surface loading rate: 111 kg/m<sup>2</sup></li> <li>Counter overturning moment: 1,26 kNm.</li> </ol>
<b>Mast tip</b>	16mm + 10mm	Aluminium rods ALMGSI0,5	1 x 1,0m 1 x 1,0m		
<b>Stand segments</b>		Stainl. steel 1.4301			
<b>Stand central tube</b>	45,0mm	Stainl. steel 1.4301 45,0 x 2mm	600 mm		
<b>Threaded rods for concrete bases</b>	16mm	Stainless steel 1.4301	240 mm		