

manufacturer test report

testing according to DIN EN 50164-1 (VDE 0185 part 201)


Falzklemme

Part No. 365 221

material: Al



DEHN + SÖHNE

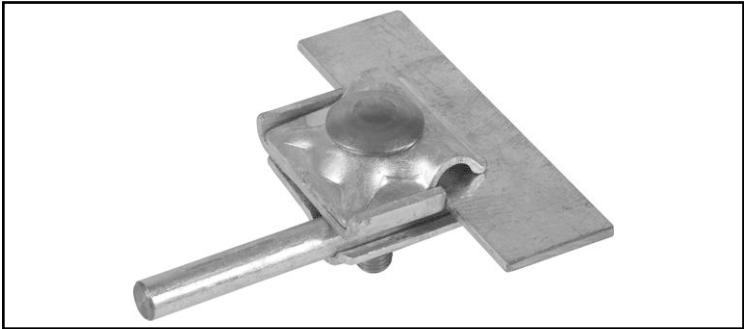

non-binding figure

application: overground

conductor connected	test result
1st conductor : Rd 8 Al	N
2nd conductor : FI 30x0,7 Al	
1st conductor : Rd 8 St/tZn	N
2nd conductor : FI 30x3,5 St/tZn	

caption

withstand lightning current class H 100 kA (10/350 µs)

withstand lightning current class N 50 kA (10/350 µs)

Detailed data of testing conditions can be requested on demand.