




(106 245)

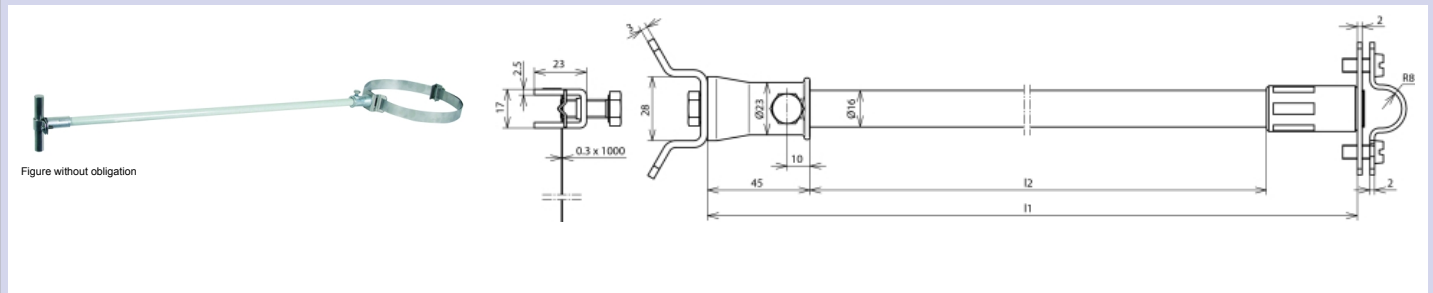

Part No.	106 245
Conductor holder support Rd	16 mm
Material of conductor holder	StSt
Length (l1)	530 mm
Insulating distance (l2)	445 mm
Clamping range of pipe	50-300 mm
Diameter of spacer	16 mm
Colour of spacer	light grey (RAL 7035)
Conductor leading	fixed
Rod / Conductor holder	2-screw cleat
Material of spacer	GRP
Material factor km	0.7
Permanent temperature range	-50 to +100 °C
Material of fixing bush	ZDC
Material of fixing element	StSt
Type	UV stabilised and weather resistant
Dimension of strip (w x d)	25x0.3 mm
Weight	561,4 g
Customs tariff number	85389099
GTIN	4013364100336
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.