


(106 115)

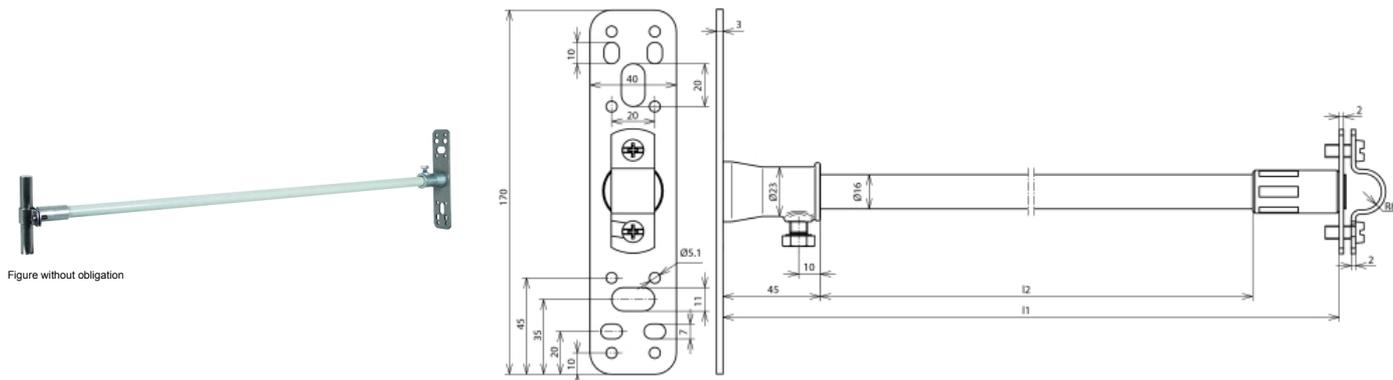

Part No.	106 115
Conductor holder support Rd	16 mm
Material of conductor holder	StSt
Length (l1)	530 mm
Insulating distance (l2)	445 mm
Fixing	[8x] Ø5.1 / [4x] 7x10 / [2x] 11x20 mm
Material of plate	StSt
Application notes	for insulated fixing of conductors
Diameter of spacer	16 mm
Colour of spacer	light grey
Conductor leading	fixed
Rod / Conductor holder	two-screw cleat
Material of spacer	GRP
Material factor km	0.7
Permanent temperature range	-50 bis +100 °C
Material of fixing bush	ZDC
Type	UV stabilised and weather resistant
Weight	488 g
Customs tariff number	85389099
GTIN	4013364100213
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.